

JINKO

575 watt

Solar Panel

DATASHEET / SPECIFICATIONS



NAME	DETAIL	NAME	DETAIL
Brand	Jinko	Tier Quality	Tier 1
Cell Type	N-Type Mono Perc Half Cut	Cell	144 [2 x 72]
Panel Wattage	575 watt	Max. Power Current	13.55 Amp
Module Efficiency	up to 22.26%	Frame	Aluminium Alloy Anodized
Open Circuit Voltage	51.27 volt	Max. System Voltage	1500 VDC
Short Circuit Current	14.31 Ampere	Max. Series Fuse Rating	30 Ampere
Operating Temperature	-40°C ~ +85°C	Refer. Bifacial Factor	80±5%
Front Glass	2.0mm, Anti-Reflection Coating	Weight	32kg
Back Glass	2.0mm, Heat Strengthened Glass	Height	89.69 inches
Power Tolerance	0~+3%	Width	44.65 inches
Maximum Power	575 Wp	Depth	1.18 inches
Max. Power Voltage	42.44 volt	Warranty	12 Years (Material), 30 Years (Performance)

For Price & More Info. Visit:



WWW.PRICECITY.COM.PK

Scan QR




*Disclaimer at website.

JINKO

575 watt Solar Panel

FEATURES

- Module efficiency up to 22.26%
- Tier-1 Quality
- Hot 2.0 Technology
- SMBB Technology
- Best shading tolerance
- Heavy snow load up to 5400 Pascal
- Wind load up to 2400 Pascal
- Up to 5.7% lower system cost
- Minimize micro-crack impacts
- Higher Power Output
- Class-A application classification

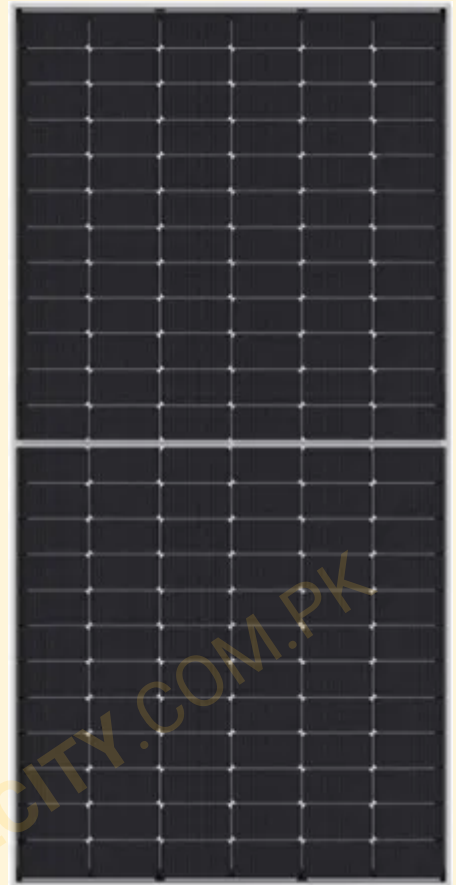

For Price & More Info. Visit:



WWW.PRICECITY.COM.PK

Scan
QR



*Disclaimer at website.