

LONGI Hi-MO6

600 watt

Solar Panel



DATASHEET / SPECIFICATIONS

NAME	DETAIL	NAME	DETAIL
Brand	LONGI	Tier Quality	Tier 1
Panel Wattage	600 watt	Fire Rating	UL Type 1 or 2, IEC Class C
Cell Type	Half Cell 144 (6x24)	Glass	Single, 3.2mm coated tempered glass
Year 2-25 Power Degradation	< 0.40%	Frame	Aluminium Alloy Anodized
Module Efficiency	23.2%	Solar Junction Box	IP68, 3 Diodes
Open Circuit Voltage	52.81 volt	Max. System Voltage	DC1500V (IEC/UL)
Short Circuit Current	14.46 Ampere	Power Output Tolerance	0 ~ 3%
Current at Max. Power	13.44 Ampere	Weight	27.5 kg
Operating Temperature	-40°C ~ +85°C	Height	89.68 inches
Voltage at Max. Power	44.66 (Vmp/A)	Width	44.64 inches
Fuse Rating	25 Ampere	Depth	1.37 inches
Protection Class	Class II	Warranty	15 Years (Material), 25 Years (Performance)

For Price & More Info. Visit:



WWW.PRICECITY.COM.PK

Scan QR




*Disclaimer at website.

LONGI

600 watt Solar Panel

FEATURES

- Excellent performance
- Module efficiency up to 23.2%
- <1.5% First-Year power degradation
- Heavy snow load
- 0.40% year 2-25 power degradation
- High module quality
- M10 Gallium-doped wafer
- Minimize micro-crack impacts
- 9-busbar Half-cut Cell
- Tier-1 quality
- Class-A application classification

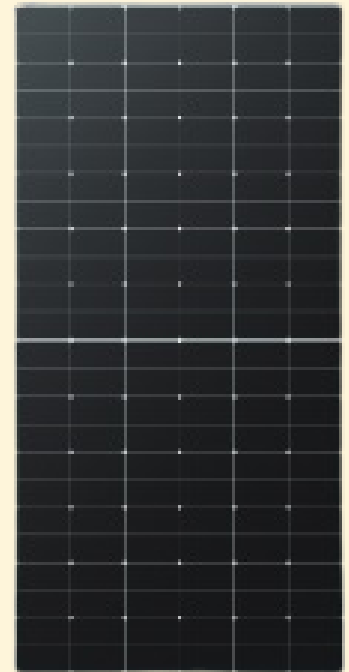

For Price & More Info. Visit:



WWW.PRICECITY.COM.PK

Scan
QR



*Disclaimer at website.